

**DK-1455**  
**5800 CFM**

The DK-1455 cyclone model is furnished with eight cloth bags and two 55 gal. drums standard, as shown.

**Extra Equipment:**

Hopper Base with 34 cu.ft. capacity. See pg. 12.

Model DAF-500 AfterFilter. See pg. 16.

Noise Reducer. See pg. 10.

Ht. DK-1455: 141"




Dust Source Inlet  
Ø to floor 106"

Cyclone is located in this middle section

Drum base with 55-gal. drums on casters

FLOOR PLAN Top View

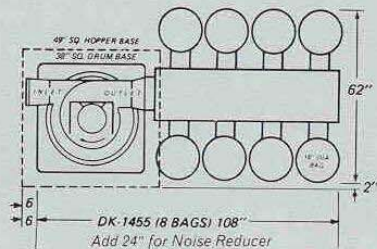

The blower housing and outlet can be rotated in relation to the inlet.

**SPECIFICATIONS** — CFM, Velocity, and Static Pressure are determined by AMCA Test Code Procedures.

Model	Motor	CFM	Velocity FPM	Static Press.	Maximum Collection Capacity				dBA, Slow Response		Inlet Dia.	Outlet Dia.	Dirt Contnr. Cap. Cu.Ft.	Bags			
					Grinding (Hard) Wheels	Buffing or Brushing Wheels	Abr. Belts w/Platens (Width)	Abr. Belts w/Contact Wheels (Width)	Without Noise Reducer	With Noise Reducer				No.	Cloth Filter Area Sq.Ft.	Net Wt. Lbs.	Ship. Wt. Lbs.
DK-1455	15HP TEFC	5800	5400	3.5"	12 16x2"	Eight 16x4"	14-4"	Eight 4"	87	84	14"	12"	15½	8	334	1070	1530

Electrical Specifications: 230/460 v., 3ph., 60 Hz.